


智能家电

导电高分子固态铝电容




SMD



导针型

- ◆ 低阻抗
- ◆ 高纹波
- ◆ 长寿命，最高可达20,000小时
- ◆ RoHS认证
- ◆ 应用：
 - 电源充电器


液态铝电解电容




SMD




导针型



牛角型



插片型

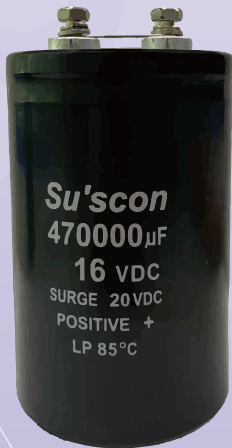

螺丝型

- ◆ 低阻抗
- ◆ 高纹波
- ◆ 耐高温，最高温可达130 °C
- ◆ 长寿命，最高可达20,000小时
- ◆ RoHS认证

- ◆ 应用：
 - 电视
 - 液晶显示器
 - 音响
 - 变频空调
 - 电源充电器
 - 节能灯

产品规格

导电高分子固态铝电容



SMD




导针型

电容类型	型态	系列	工作电压(V)	电容量(μF)	适用温度(°C)	负荷寿命(hrs)	尺寸(DxL, mm)	AEC-Q200
导电高分子 固态铝电容	SMD	PH	2.5~50	10~2,200	-55~+105	20,000	6.3x6~10x12.5	
		PV	2.5~63	10~2,700	-55~+105	15,000	5x6~10x12.5	
		VA	2.5~2.5	22~2,700	-55~+105	2,000	5x6~10x12.5	
		VC	2.5~16	68~2,700	-55~+105	2,000	5x6~10x12.5	
		VH	35~100	12~220	-55~+105	2,000	6.3x6~10x12.5	
		VL	4~50	10~2,200	-55~+105	5,000	6.3x6~10x12.5	●
		VP	6.3~35	56~1,800	-55~+125	2,000	6.3x9.5~10x12.5	●
		VT	4~50	10~2,200	-55~+125	1,000	6.3x6~10x12.5	●
	导针型	EA	2.5~25	6.8~2,700	-55~+105	2,000	5x6~10x14	
		EC	2.5~16	82~2,700	-55~+105	2,000	5x6~10x20	
		EH	35~100	12~470	-55~+105	2,000	6.3x6~10x12	
		EL	2.5~50	10~2,200	-55~+105	5,000	6.3x6~10x12	●
		EP	6.3~35	56~1,800	-55~+125	2,000	6.3x8~10x12	●
		ET	4~50	10~2,500	-55~+125	1,000	6.3x6~10x12	●
		PC	2.5~63	10~2,700	-55~+105	15,000	5x6~10x20	
		PL	2.5~50	10~2,200	-55~+105	20,000	6.3x6~10x12	●



产品规格

液态铝电解电容								
     SMD 导针型 牛角型 插片型 螺丝型								
电容类型	型态	系列	工作电压(V)	电容量(μF)	适用温度(°C)	负荷寿命(hrs)	尺寸(DxL, mm)	AEC-Q200
液态铝电解电容	SMD	CD	6.3~100	1~1,500	-55~+105	2,000~3,000	4x5.4~10x10	●
		CDS	6.3~50	22~2,200	-55~+105	2,000	4x6~10x10	●
		CH	4~50	0.1~1,500	-55~+105	1,000	4x5.4~10x10	
		CK	6.3~50	0.1~1,000	-55~+105	2,000	4x5.4~10x10	●
		CL	160~400	2.2~82	-40~+105	2,000	8x10.5~16x16.5	●
		CLL	6.3~50	10~1,000	-25~+105	7,000~10,000	4x7~10x10	●
		CN	6.3~50	0.1~100	-55~+85	1,000	4x5.4~6.3x5.4	●
		CS	4~100	0.1~1,500	-55~+85	2,000	4x5.4~10x10	
		AK	200, 400	22~470	-25~+105	2,000	10x10~22x40	
		HA	160~400, 450	1~220	-40~+105, -25~+105	3,000	6.3x11~18x40	
	导针型	HB	160~400, 450	1~220	-40~+105, -25~+105	5,000	6.3x11~18x40	
		HD	160~450	1~220	-25~+105	10,000	8x12~18x40	
		HE	160~400, 450	6.8~220	-40~+105, -25~+105	10,000	10x16~18x40	
		HF	6.3~100	5.6~18,000	-40~+105	4,000~8,000	5x11~18x40	
		HG	6.3~100	6.8~18,000	-40~+105	4,000~10,000	5x11~18x40	
		HFN	6.3~50, 63~100	5.6~18,000	-55~+105, -40~+105	4,000~8,000	5x11~18x40	●
		HGN	6.3~50, 63~100	6.8~18,000	-55~+105, -40~+105	4,000~10,000	5x11~18x40	●
		HH	160~400, 450	6.8~680	-40~+105, -25~+105	10,000~12,000	10x16~18x50	
		HN	6.3~160	0.1~1,000	-40~+105	2,000	4x7~16x32	
		HR	25, 35, 50, 100	2.2~10	-40~+105	1,000	10x20~16x36	
		HU	10~100	0.47~330	-25~+105	10,000	5x12~8x12	
		HW	400~450	6.8~120	-25~+105	15,000~20,000	6.3x11~20x45	
		HX	6.3~100	5.6~18,000	-40~+105	6,000~10,000	5x12~18x40	
		LF	400, 450~500	10~150	-40~+85, -25~+85	8,000	10x16~20x45	
		NK	400~500	4.7~100	-40~+105	3,000	6.3x12~18x25	
		M5	6.3~35	1~100	-40~+105	1,000	4x5~6.3x5	
		MC	6.3~400, 450	1~15,000	-40~+105, -25~+105	2,000~3,000	5x11~18x40	
		MF	6.3~400, 450	1~15,000	-40~+105, -25~+105	2,000~5,000	5x11~18x40	
		MD	6.3~35	6.8~220	-40~+105	1,000	4x7~8x7	
		MG	6.3~35	47~8,200	-40~+105	5,000~6,000	5x11~16x26	

产品规格

电容类型	型态	系列	工作电压(V)	电容量(μF)	适用温度(°C)	负荷寿命(hrs)	尺寸(DxL, mm)	AEC-Q200
液态铝电解电容	导针型	SA	6.3~100	0.1~4,700	-40~+85	2,000	5x11~18x40	
		SB	6.3~100	0.1~4,700	-40~+105	1,000	5x11~18x40	
		SD	6.3~400, 450	0.47~15,000	-40~+105, -25~+105	2,000	5x11~18x40	
		SDA	400, 450~500	10~150	-40~+105, -25~+105	2,000	10x16~22x45	
		SDN	6.3~100, 160~400	0.47~15,000	-55~+105, -40~+105	2,000	5x11~18x40	●
		SE	6.3~250, 350~450	0.47~22,000	-40~+105, -25~+105	3,000~5,000	5x11~25x50	
		SEA	400, 450~500	10~150	-40~+105, -25~+105	5,000	10x16~22x45	
		SEN	160~400	2.2~120	-25~+105	3,000~5,000	6.3x11~18x40	●
		SER	160~400, 450	22~470	-40~+105, -25~+105	5,000	10x16~18x45	
		SG	6.3~50	22~6,800	-40~+105	2,000~5,000	5x11~16x26	
		SGN	6.3~50	22~6,800	-55~+105	2,000~5,000	5x11~16x26	●
		SH	10~250, 350~450	0.47~1,000	-40~+125, -25~+125	2,000	6.3x11~16x36	
		SK	6.3~250, 350~500	0.1~22,000	-40~+105, -25~+105	2,000	5x11~22x50	
		SKA	400, 450~500	10~150	-40~+105, -25~+105	2,000	10x16~22x45	
		SKR	160~400, 450	22~470	-40~+105, -25~+105	2,000	10x25~18x45	
		SL	6.3~250, 350~500	0.1~33,000	-40~+85, -25~+85	2,000	8x9~25x50	
		SM	6.3~50	0.1~330	-40~+105	1,000	4x7~8x7	
		SN	6.3~100	0.1~6,800	-40~+85	2,000	4x7~18x35	
		ST	6.3~50	0.1~220	-40~+105	5,000	4x7~8x7	
		SX	10~50	100~2,700	-40~+105	4,000~5,000	8x12~10x35	
		UH	10~250, 350~450	1.8~4,700	-40~+130, -25~+130	2,000~3,000	8x12~16x36	
		UK	6.3~250, 350~450	0.1~22,000	-40~+105, -25~+105	3,000	5x11~22x50	
		YR	6.3~100	1~10,000	-40~+105	2,000	5x11~18x40	
	牛角型	AU	16~250, 400~450	56~33,000	-40~+105, -25~+105	2,000	22x20~35x50	
		AZ	200, 400, 420	33~1,200	-25~+105	2,000	22x20~35x50	
		HZ	16~250, 350~450	47~47,000	-40~+105, -25~+105	3,000	20x25~35x50	
		LX	10~100, 160~500	47~68,000	-40~+85, -25~+85	2,000	22x20~45x100	
		LXA	10~100, 160~500	47~68,000	-40~+85	5,000	22x20~45x100	
		LXB	10~100, 160~500	47~68,000	-40~+85	3,000	22x20~45x100	
		LZ	10~250, 350~500	68~68,000	-40~+105, -25~+105	2,000	20x20~35x65	
		TZ	200~450	220~1,800	-25~+105	10,000	30x30~40x60	
	插片型	LM	16~250, 315~450	68~150,000	-40~+85, -25~+85	2,000	25x30~51x105	
	螺丝型	LP	16~250, 350~500	470~500,000	-40~+85, -25~+85	3,000	35x80~90x190	