



再生能源


液态铝电解电容

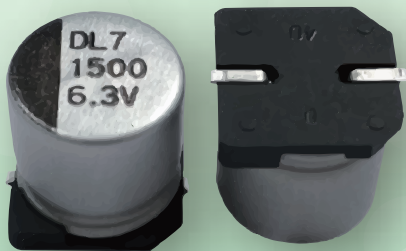


SMD

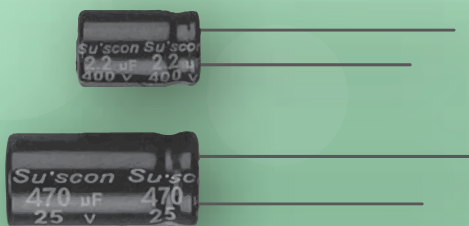

导线型

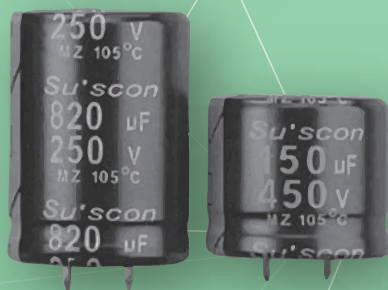

牛角型

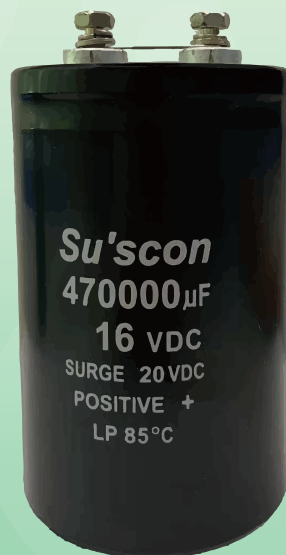

螺丝型

- ◆ 低阻抗
- ◆ 高纹波
- ◆ 耐高温，最高温可达125 °C
- ◆ 长寿命，最高可达20,000小时
- ◆ RoHS认证
- ◆ 应用：
 - 太阳能光伏逆变器
 - 风力发电

产品规格

电容类型	形态	系列	工作电压(V)	电容量(μF)	适用温度(°C)	负荷寿命(hrs)	尺寸(DxL, mm)	AEC-Q200
液态铝电解电容	SMD	CD	6.3~100	1~1,500	-55~+105	2,000~3,000	4x5.4~10x10	●
		CDL	6.3~100	22~1,500	-55~+105	5,000	8x10~16x16.5	●
		CDS	6.3~50	22~2,200	-55~+105	2,000	4x6~10x10	●
		CG	10~63, 80~160	2.2~470	-55~+125, -40~+125	2,000~3,000	6.3x5.4~10x10	●
		CGL	16~50	33~330	-40~+125	3,000	8x10~10x10	●
		CGS	6.3~100	1~4,700	-55~+125	1,000~2,000	6.3x6~16x16.5	●
		CK	6.3~50	0.1~1,000	-55~+105	2,000	4x5.4~10x10	●
		CKL	6.3~50	22~1,000	-40~+105	5,000	8x10~10x10	●
		CLL	6.3~50	10~1,000	-25~+105	7,000~10,000	4x7~10x10	●
	导针型	HE	16~400, 450	6.8~220	-40~+105, -25~+105	10,000	10x16~16x50	
		HG	6.3~100	6.8~18,000	-40~+105	4,000~10,000	5x11~18x40	
		HU	10~100	0.47~330	-25~+105	10,000	5x12~8x12	
		HW	400~450	6.8~120	-25~+105	15,000~20,000	6.3x11~20x45	
	牛角型	LXA	10~100, 160~500	47~68,000	-40~+85	5,000	22x20~45x100	
		LXB	10~100, 160~500	47~68,000	-40~+85	3,000	22x20~45x100	
	螺丝型	HP	10~100, 160~450	220~1,000,000	-40~+105, -25~+105	2,000~5,000	35x80~100x220	
		LP	16~250, 350~500	470~500,000	-40~+85, -25~+85	3,000	35x80~90x190	
		LS	350~500	1,000~150,000	-25~+85	5,000	64x95~90x175	
		LV	500~650	470~500,000	-25~+85	5,000	51x95~100x250	
		LW	350~450	1,000~15,000	-25~+85	10,000	51x85~90x195	

Su'scon

www.su-scon.com
sales@su-scon.com.tw

冠坤电子企业股份有限公司 KUAN KUN ELECTRONIC ENTERPRISE CO., LTD

台 北 | +886-2-8226-9699 | 台湾新北市23511中和区建八路2号5楼之3
东 莞 | +86-769-8731-8000 | 中国广东省523648东莞市清溪镇银河工业区
苏 州 | +86-512-6285-7850 | 苏州工业园区启月街288号紫金东方广场1商幢2-1008室

